


Rinotap A colourful doormat collection

Type	Use	Traffic	Mat Matrix
Scraping	Indoor	Medium	B

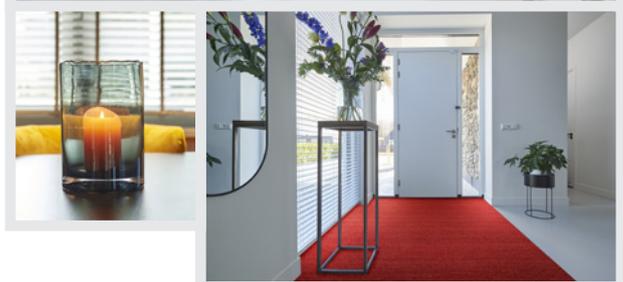

The Rinotap coir mat absorbs moisture and scrapes dirt. An authentic mat for light commercial use (use class 31), for instance in smaller offices and residential environments. Rinotap is made of environmentally friendly, coloured, coir yarn and available in 11 colours!

Design

The original Rinos product – for reasons still applicable today. The classic coir look is timeless and complements any interior, from modern to classic. The coarse, brush-like texture combined with the yarn's natural colour nuance makes this mat combine well with cement floors, ceramic tiles, wood, and even textile flooring. In addition to its natural colour, Rinotap offers 10 beautiful, bright colours, from fresh green, bright yellow and shades of red to petrol blue-green. Three grey and two brown colourways offer more restful tones – always, of course, with the characteristic, nuanced colours of coir.




Ceramics – natural stones tile warm beige with Rinotap Green

Matching all floors

Our designers develop colourways that complement every interior style. For ambiances ranging from classic to modern design. The broad Rinos range always has the right solution, to complement both interior design and floor type. **Make your own combination on our website and be inspired by our options.**

Colours

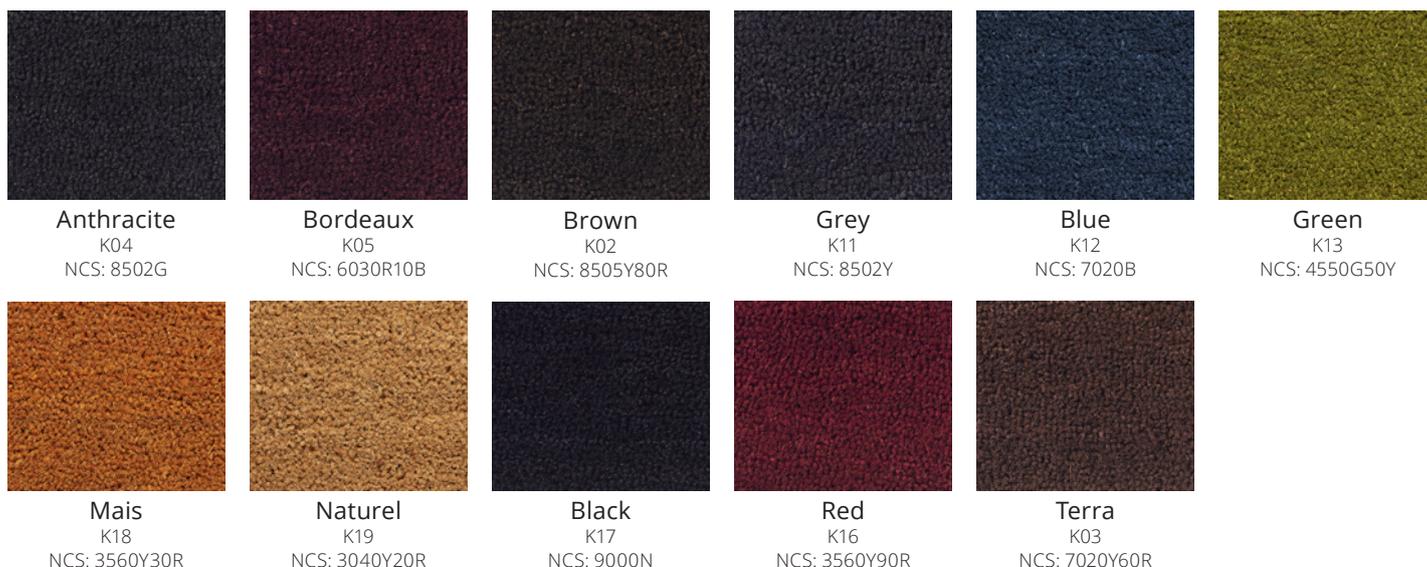

Specifications

PVC

Pile material	100% machine-spun coconut fibre yarns
Pile weight ISO 8543	13 mm ± 2,35 kg m ² 17 mm: ± 2,65 kg m ² 20 mm: ± 3,15 kg m ² 23 mm: ± 3,60 kg m ² 28 mm: ± 4,35 kg m ²
Use classification EN 1307	Natural: 31, Colour: NPD
Flammability Euroclass EN 13501	Efl
Sizes rolls ***	100/200 cm, ± 12,5 m ³
Backing	PVC with integrated stability scrim
Absorption capacity TNO W6034	17 mm ± 7,1 l/m ²
Total weight ISO 8543	13 mm ± 5,35 kg m ² 17 mm: ± 5,65 kg m ² 20 mm: ± 6,15 kg m ² 23 mm: ± 6,60 kg m ² 28 mm: ± 7,65 kg m ²
Pile height ISO 1766	Natural: 10, 14, 17, 20 and 25 mm, Colour: 14 and 20 mm
Total height ISO 1765	Natural: 13, 17, 20, 23 and 28 mm, Colour: 17 and 23 mm
Pile density ISO 8543	NPD
Number of stitches ISO 1763	± 38.000 /m ²
Wearing class EN 1963	32
Comfort EN 1307	LC5
Dimensional stability ISO 2551	NPD
Light fastness ISO 105 B02	Natural: >6, Colour: NPD
Water fastness ISO 105 B01	Natural: 3-4, Colour: NPD
Rubbing fastness ISO 105 X12	Natural: 3-4, Colour: NPD
Salt water ISO 105 E02	Natural: 3-4, Colour: NPD
Shampoo BS 1006	Natural: 3-4, Colour: NPD
Organic solvents ISO 105 X05	Natural: 3-4, Colour: NPD
Static charge ISO 6356	2,0 kV
Slip Resistance EN 13893	DS
Yarn construction	Velour
Design	Natural/Colour: Uni
Colours	11
Suitability for stairs EN 1963	NPD
Suitability for castor chairs EN 985	NPD
Declaration of Performance	Available

 Excluding loose-laid mats
EN 14061:2004

* The roll lengths are an indication. Delivered length can be up to 15% higher or lower. Installation and maintenance advice is available on our website.

Contact us for more information

Our employees are ready to answer questions or to take your orders. **Call +31 38 385 35 00** or mail customerservice@rinos.com

Where to use?

	high traffic	medium traffic
Not combined with outdoor matting (scraping)	A	B
Combined with outdoor matting (absorbing)	C	D
Outdoor matting	E	

© Rinos B.V.

rinos.com/products/rinotap